
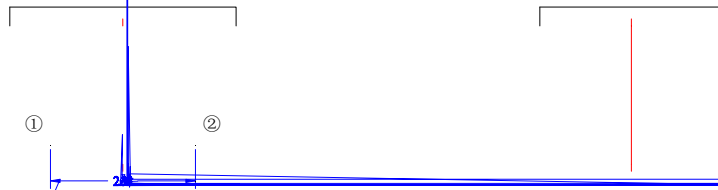


## Features

- Pb free product—RoHS compliant
- High Photo Sensitivity
- Reliable and rugged
- Long life – solid state reliability
- Sensitivity angle:  $35^{\circ}$

## Package Dimension



Part NO.
SL-T4232PT







### Notes:

1. All dim
2. Tol
- 3.





## Typical Electrical / Optical Characteristics Curves (25 Ambient Temperature Unless Otherwise Noted)

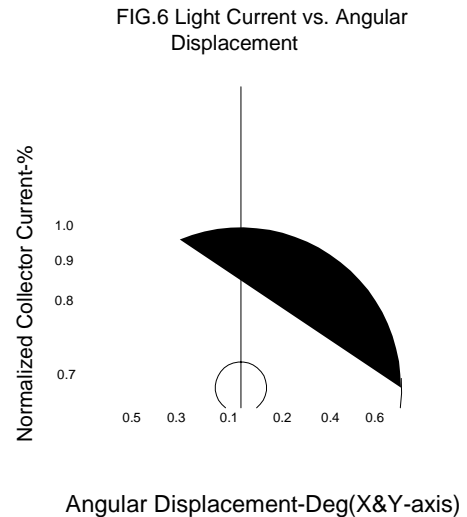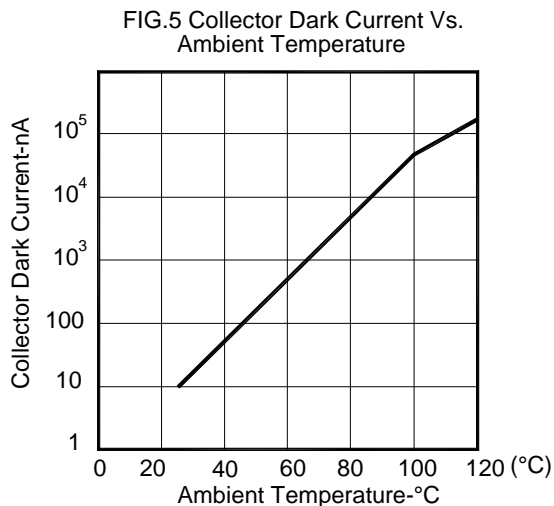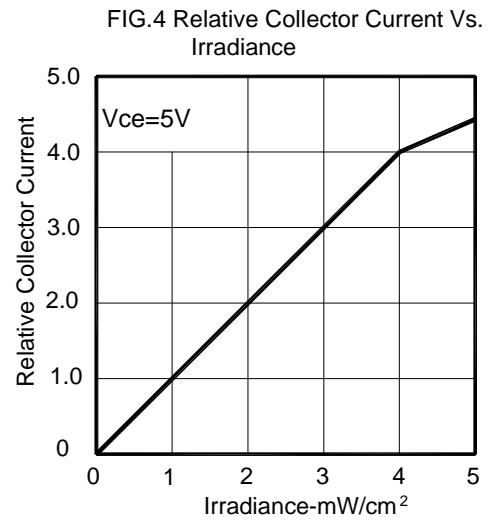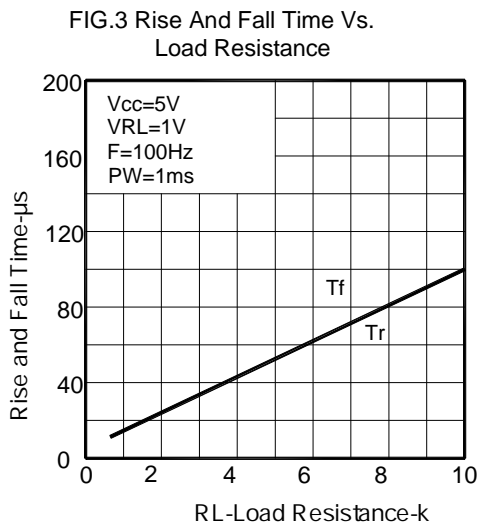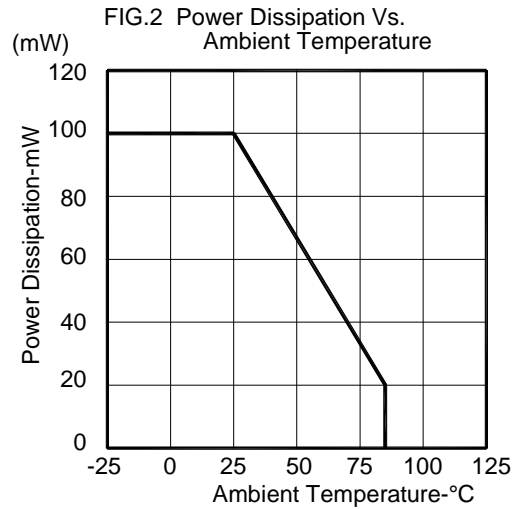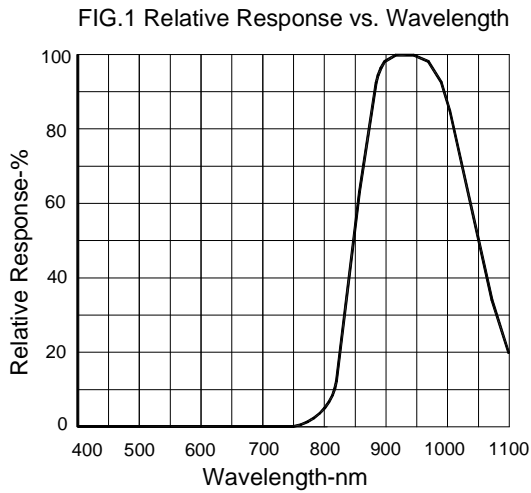





Ic(on) Bin Code ( $V_{CE}=5V$ ,  $E_e=1mW/cm^2$ ,  $p=940$ )

## Label Explanation

### LIGHT Universal Label

<b>LIGHT</b> Light Electronics CO., LTD.	
MODEL NAME: _____	 LOT NO. : _____
QUANTITY: _____	
BIN: _____	
PACKING DATE: _____	
REMARKS: _____	

### Customer Defined Label

<b>LIGHT</b> Light Electronics CO., LTD.	
MODEL NAME: _____	 Y: _____
QUANTITY: _____	
BIN: _____	
PACKING DATE: _____	
CUSTOMER: _____	





