

G

LIGHT ELECTRONICS CO., LTD.

LIGHT

LIGHT ELECTRONICS CO., LTD.

Infrared Photo Diode Specification

Commodity: Infrared Photo diode


Reverse Light Current Bin Limits

BIN CODE	Min.(μA)	Max.(μA)
1	26	31
2	31	37
3	37	44
4	44	53

NOTE: The I_L guarantee should be added $\pm 15\%$ tolerance.

Label Explanation

LIGHT Universal Label

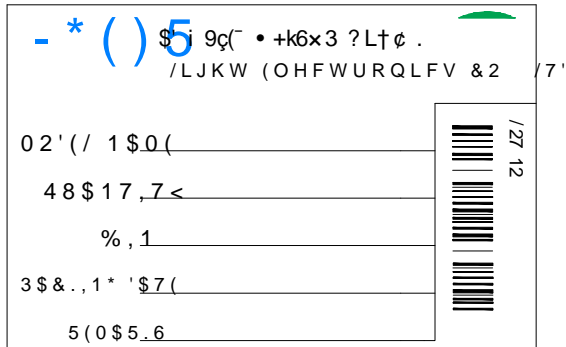

- * () 5
 \$ i 9c (• +k6×3 ?L†ø .
 /LJKW (OHFWURQLFV & 2 /7'
 02' (/ 1 \$0.
 48 \$ 17,7 <
 %, 1
 3 \$ & ., 1 * '\$7 (
 5 (0 \$ 5.6
 127 12

Customer Defined Label



Ÿ ÷ Á -
 | H
 1•4Ÿ
 ; >û U
 Ø mĭ -
 RoHS

Carrier Tape Specifications (Loaded Quantity: 2200pcs/reel)

Note: Tolerance unless mentioned is $\pm 0.1\text{mm}$; Unit = mm

Moisture Resistant Packaging

