

# **SL-T3020IRC050-L236-C-S**

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_



### Absolute Maximum Ratings at Ta=25


**1. Storage and operating:**

### Electrical Optical Characteristics at Ta=25

	2					
Peak Wavelength	p	---	940	---	nm	I
		---	50	---	nm	I

Note:

2





**LIGHT**

**LIGHT**

**Label Explanation**

**LIGHT**

Light Electronics CO., LTD.

MODEL NAME: \_\_\_\_\_

QUANTITY: \_\_\_\_\_

BIN: \_\_\_\_\_

PACKING DATE: \_\_\_\_\_


REMARKS: \_\_\_\_\_

Part No. | **SL-T3020IRC050-L2**





## Suggest IR Reflow Condition For Lead Free

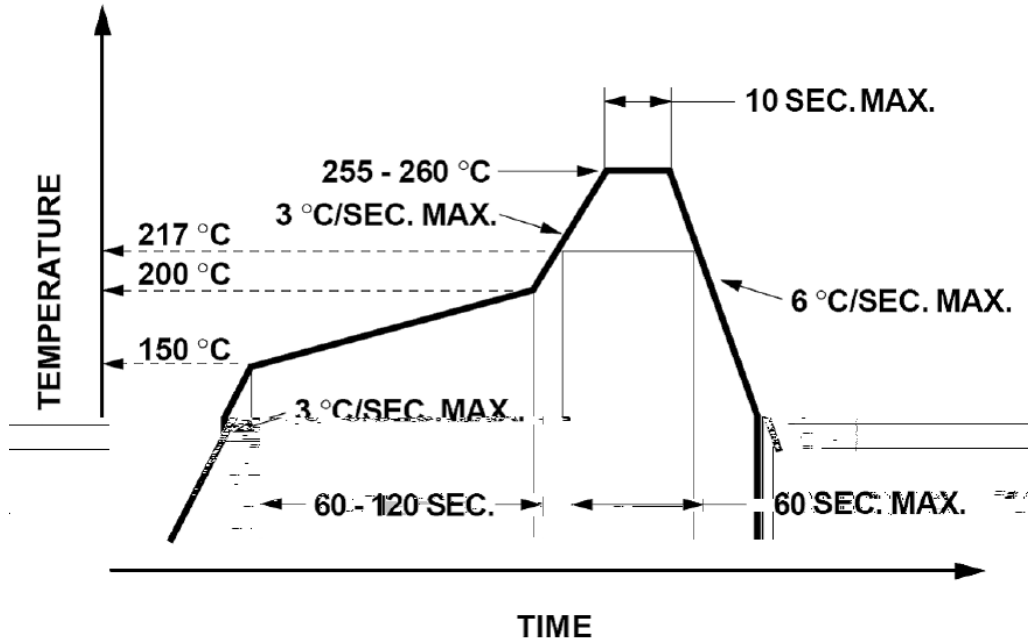

Soldering iron

°C

Repairing

