





### Features

- ◆ Pb free product—RoHS compliant
- ◆ Low power consumption, High efficiency
- ◆ Reliable and rugged
- ◆ Long life – solid state reliability
- ◆ Viewing Angle: 120°

### Package Dimension

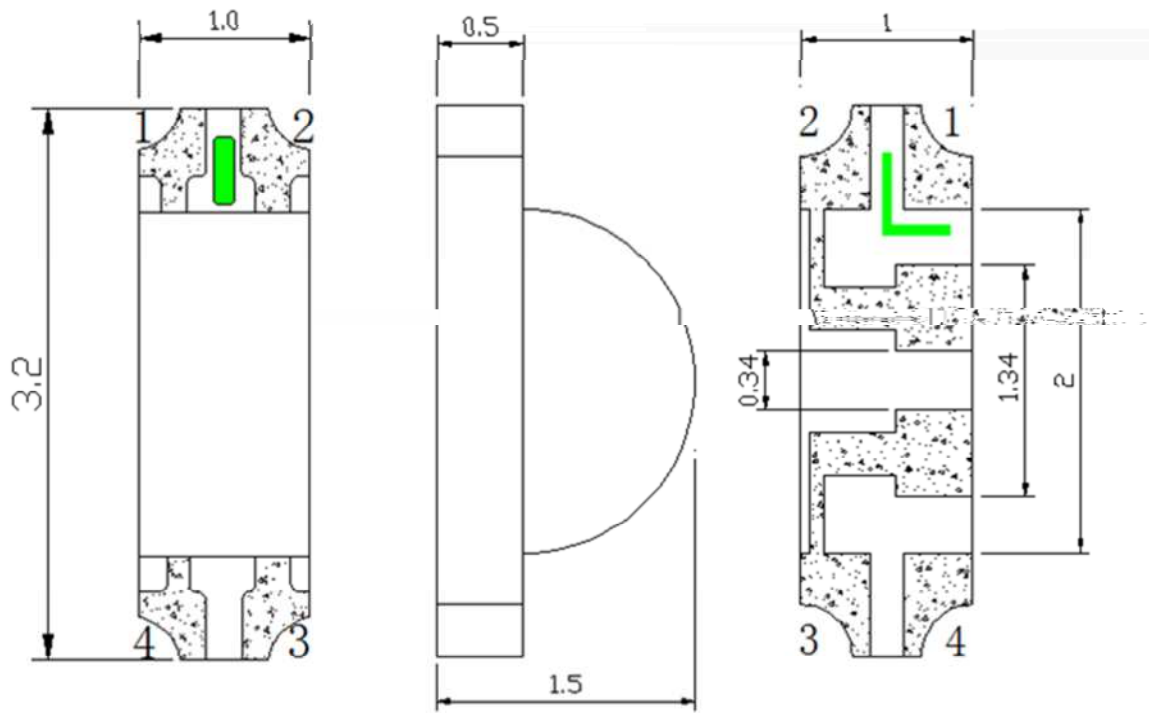

Part NO.	Lens Color	Source Color
SL-T3210WOD020-L150	Yellow Diffused	White / Orange

**Notes:**

1. All dimensions are in millimeters.
2. Tolerance is ±0.10mm unless otherwise noted.

# LIGHT



□ □	□	□	
□			
	□		
	□		
	□	□	

□

□

□

□

□

□

□

□

□

□

□

□

□

□

# LIGHT



			□□		□		□
			□		□□		
				□			
			□□□		□□□		□
			□□		□		□
				□			□
							□
							□
					□		


□ □

□

□




# LIGHT

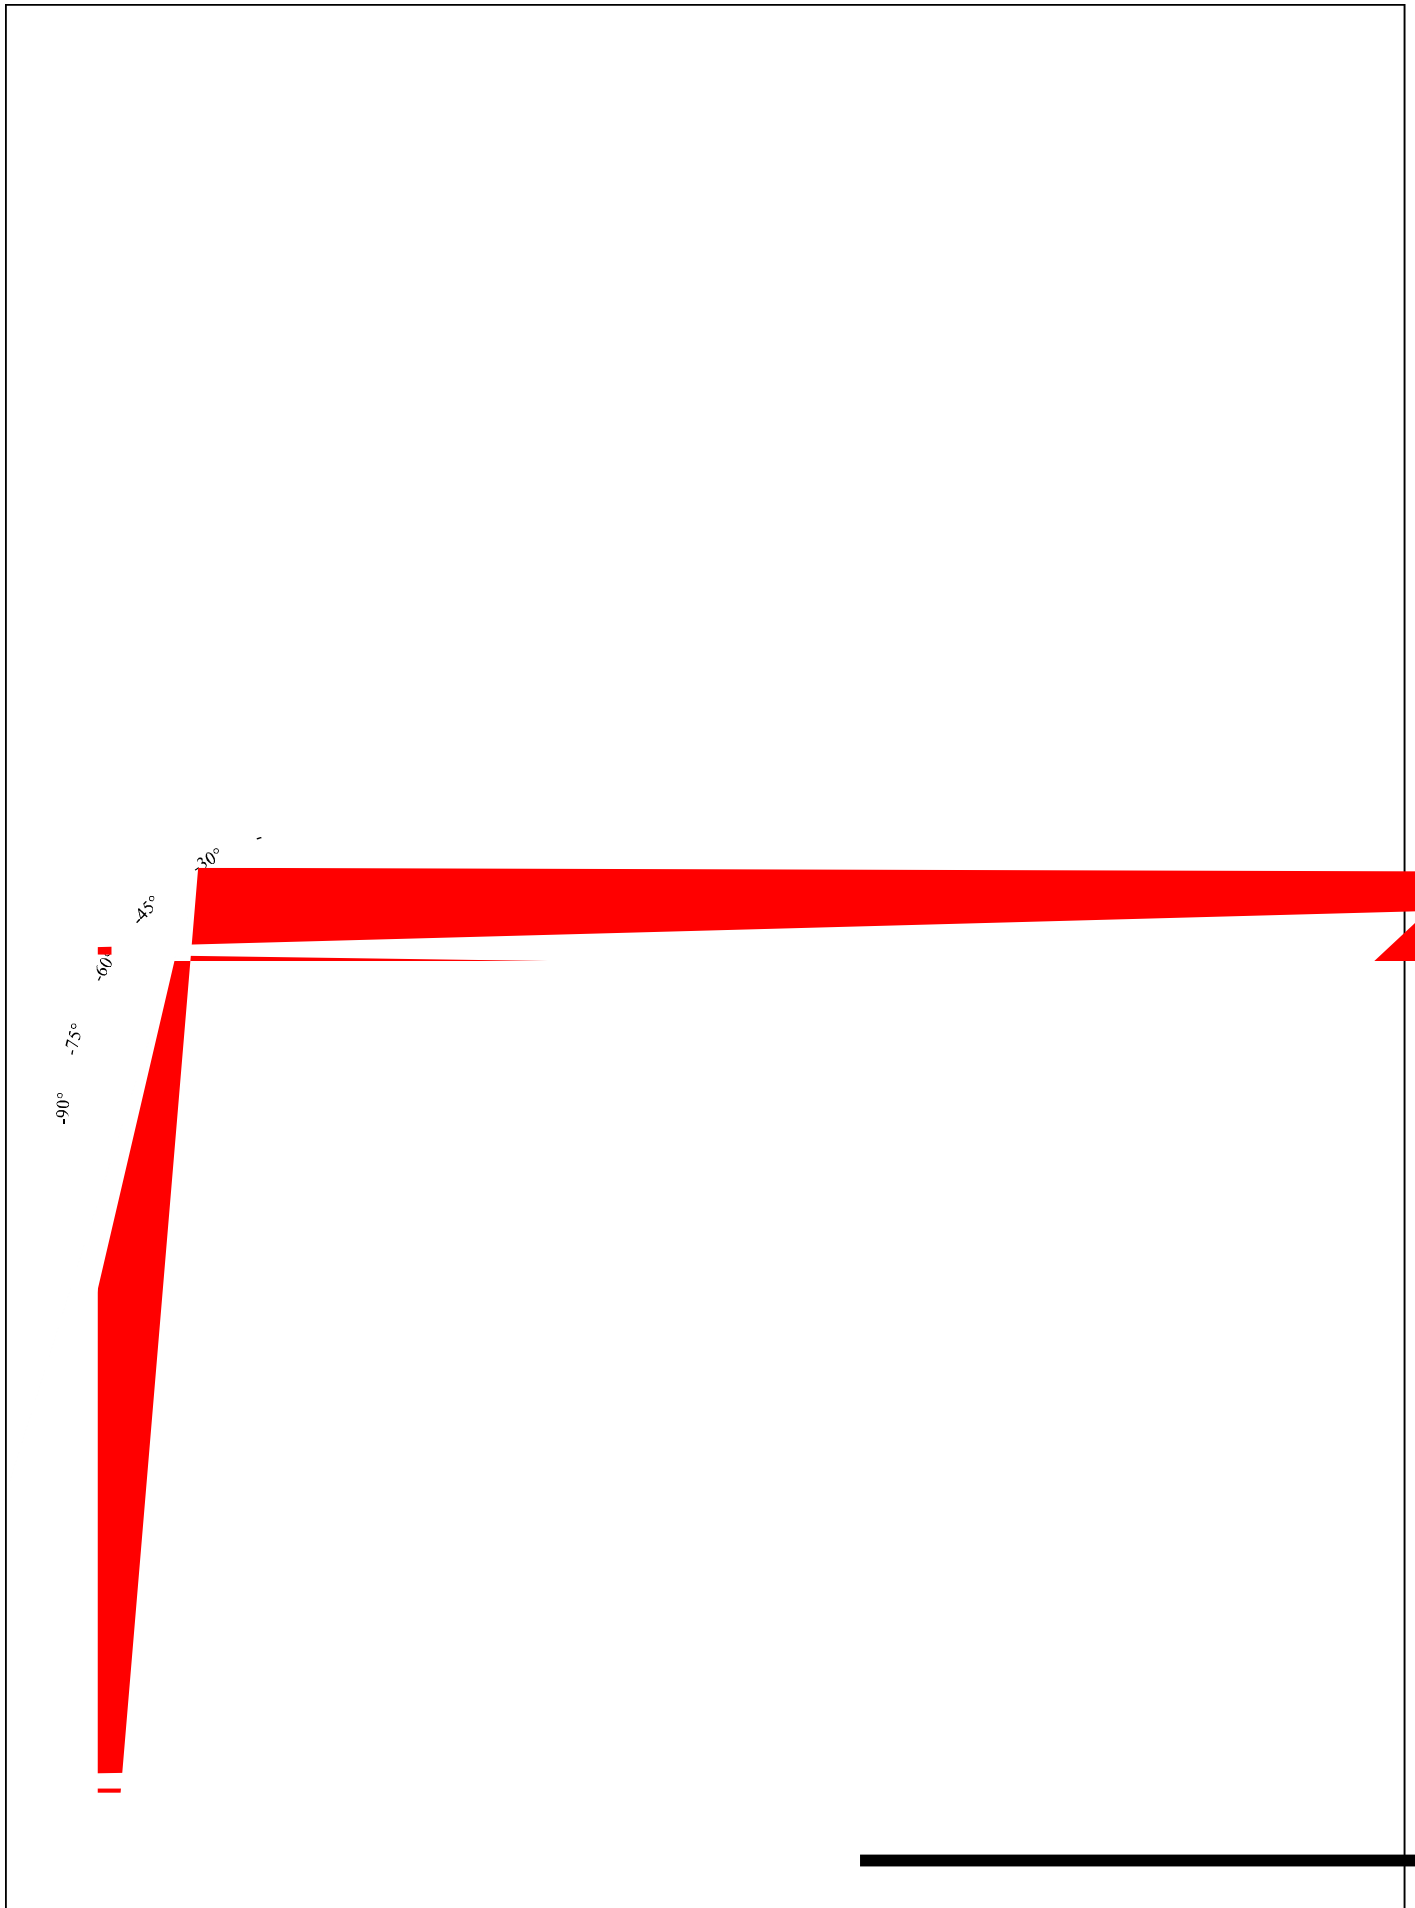


-90°  
-75°  
-60°  
-45°  
-30°


--	--	--	--

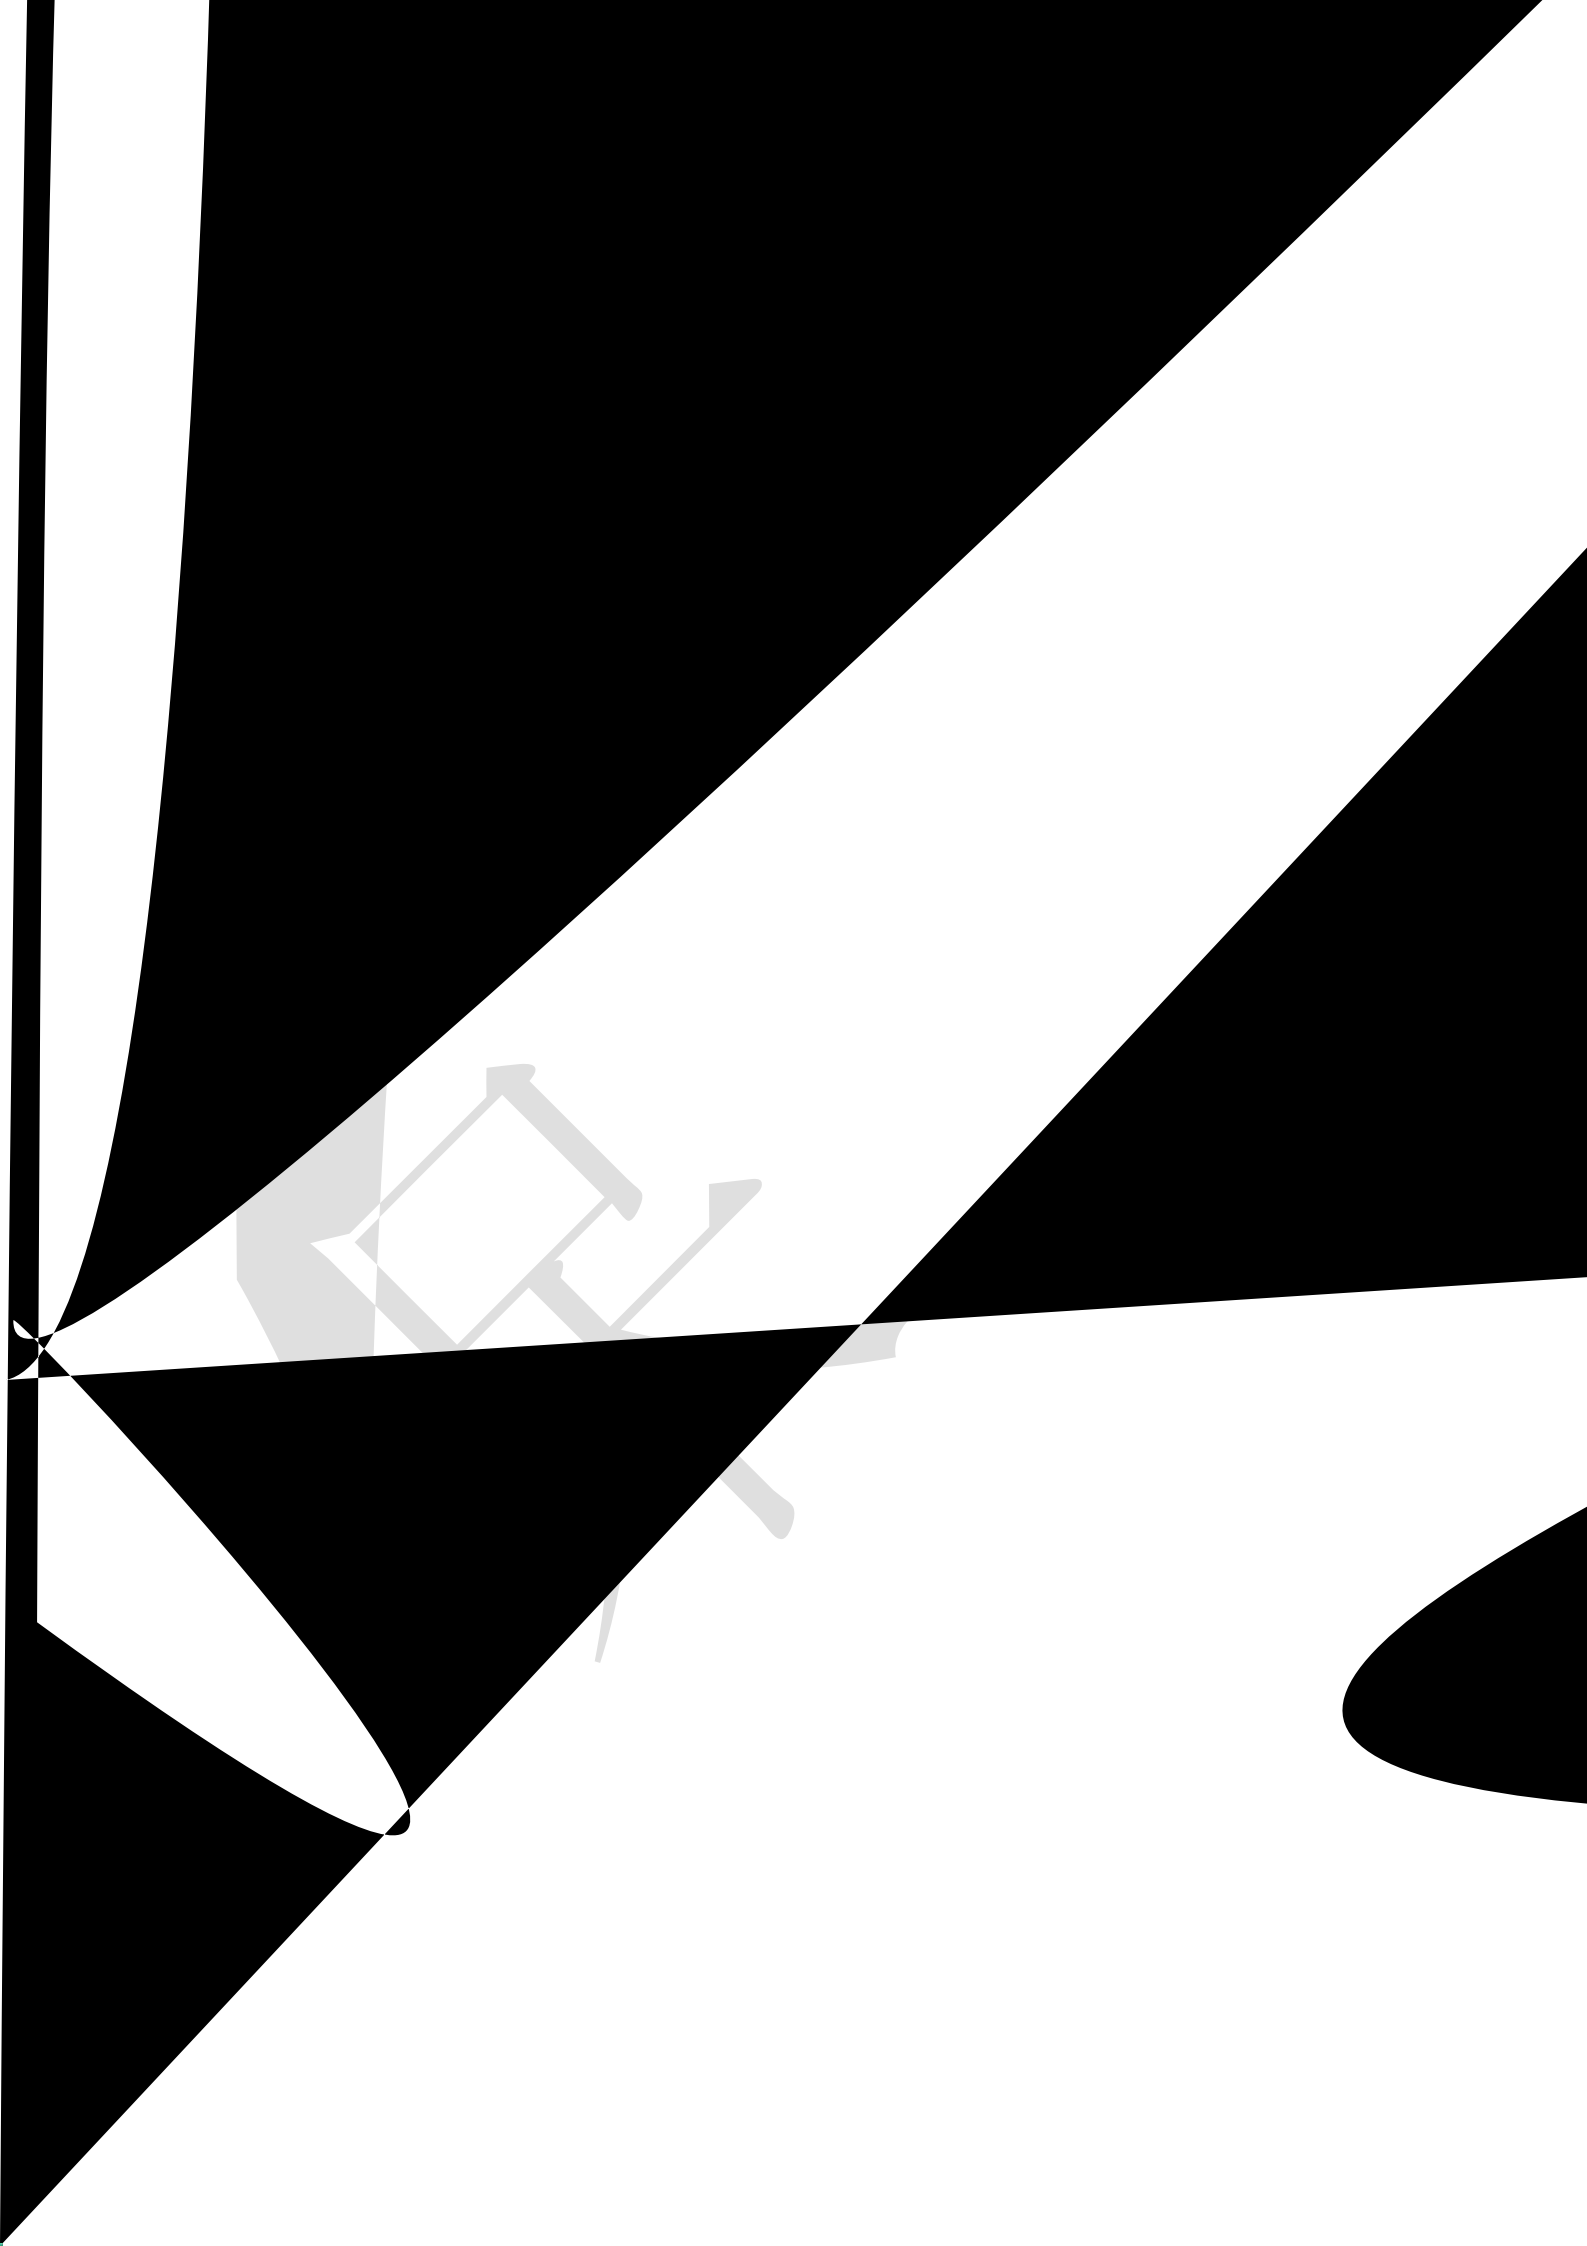

### Carrier Tape Specifications (Loaded Quantity: 3000pcs/reel)

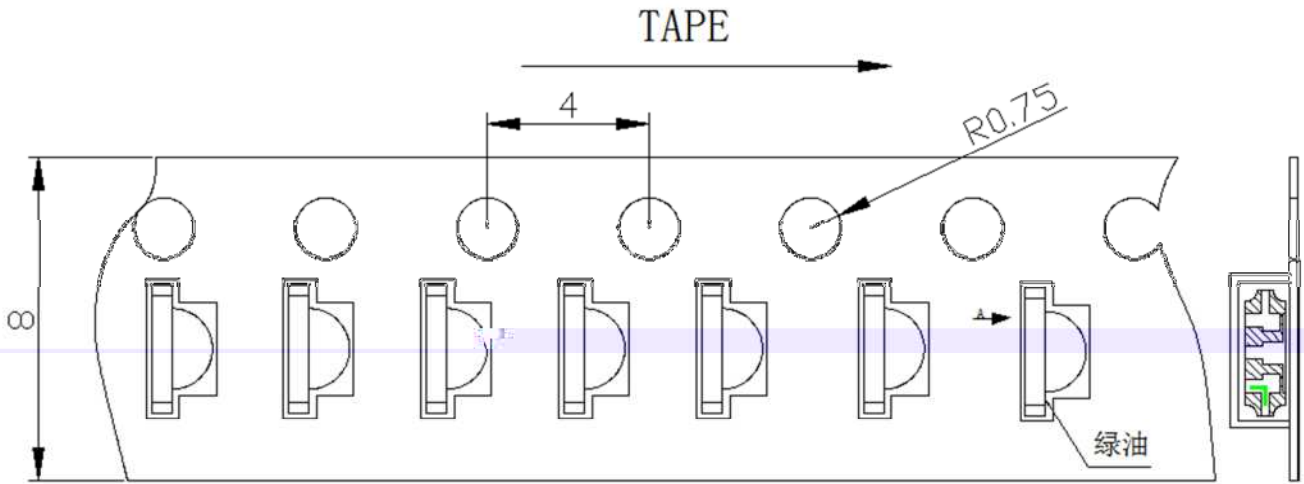


### Moisture Resistant Packaging

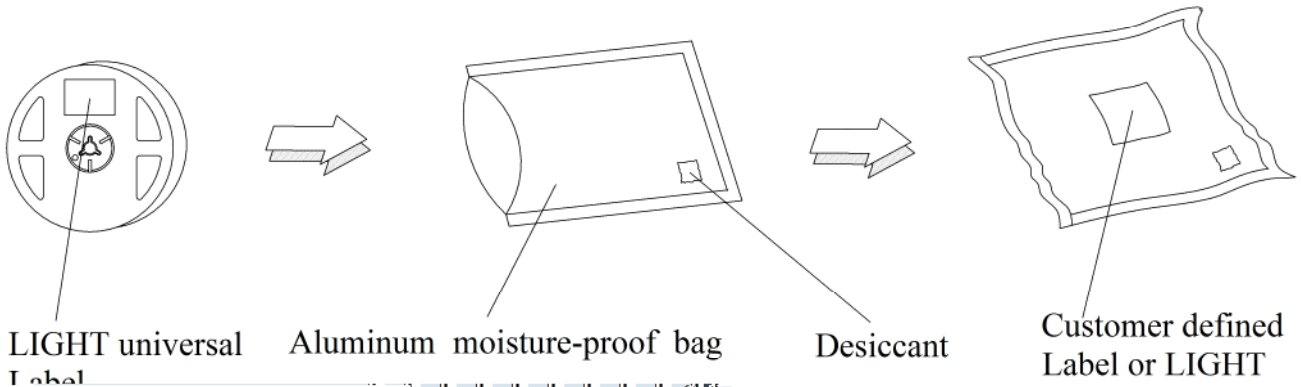

universal Label



## Suggest IR Reflow Condition For Lead Free

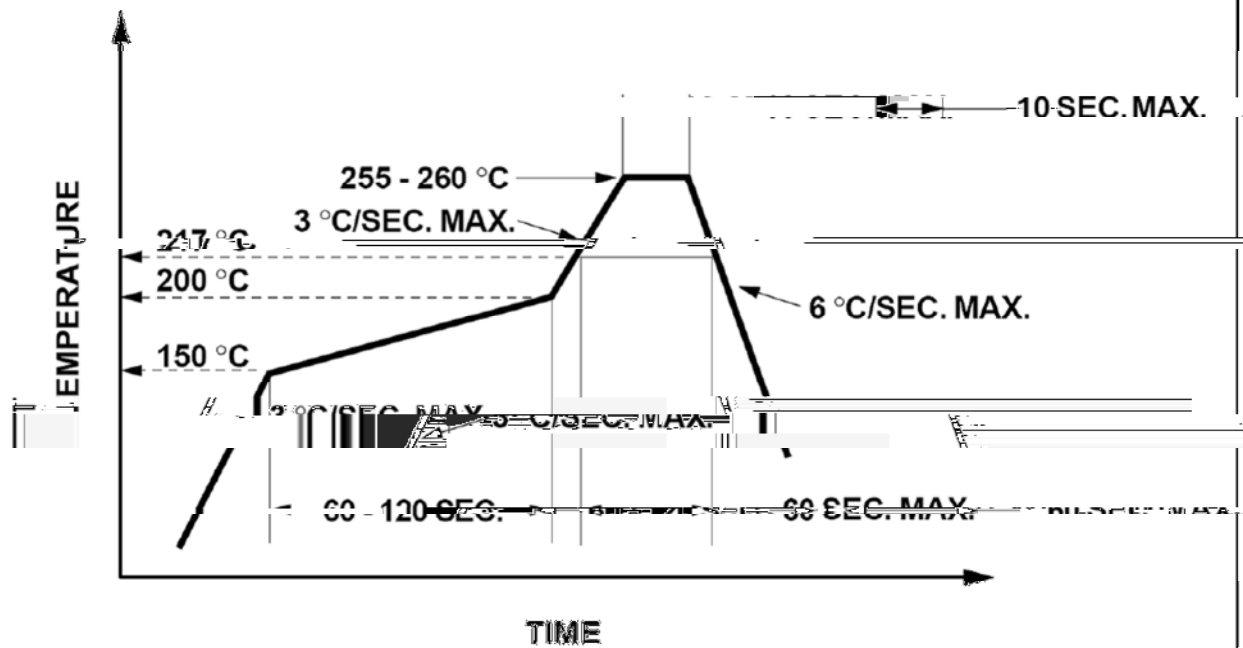

1. Reflow soldering should not be done more than two times.
2. When soldering, do not put stress on the LEDs during heating.

## Soldering iron

1. When hand soldering, the temperature of the iron must less than 300°C for 3 seconds.
2. The hand solder should be done only once.

## Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of LEDs will or will not be damaged by repairing.

